


PARTS & ASSEMBLY SHEET

Fixture Name: Joia 1993-WSC PS

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.


PARTS LIST		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
Mounting strap 1ea 4"		Threaded rod (Nipple) 1ea 3/8 X 35mm	 Mounting screw 2ea 8/32 X 1"
Spring washer 1ea 15 X 3mm		Hex nut 1ea 3/8 X 3mm	 Deco nut (round nut) 1ea @16mm
Green Ground screw 1ea 8/32" X 10mm		Wire connector 3ea P4 Orange	
Part Needed _____			Quantity _____
Part Needed _____			Quantity _____
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Install the light bulbs in accordance with the fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

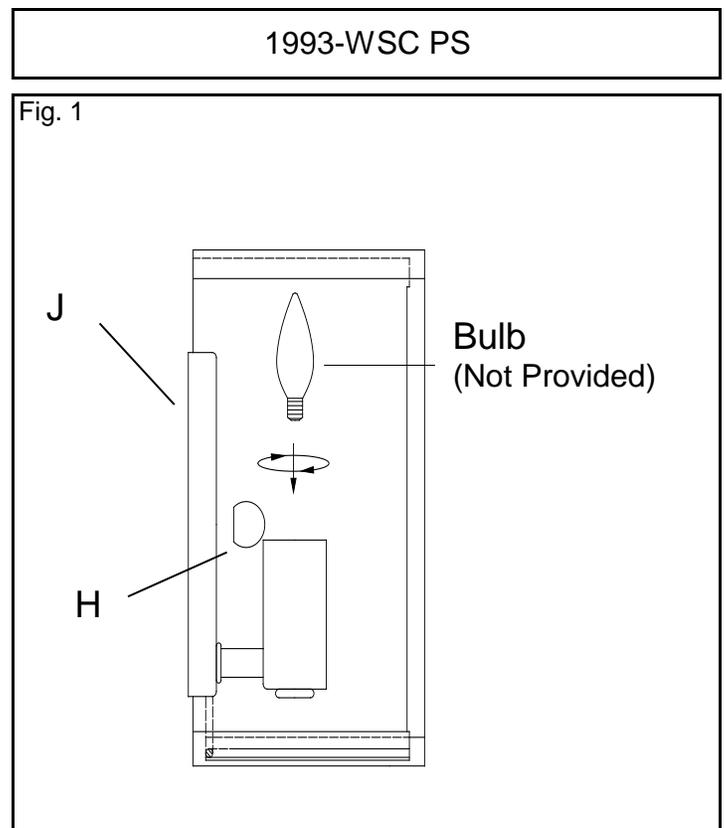

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A). Tighten with Hex Nut (B) and Spring Washer (C).
4. Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

6. Attach the GROUND wire (GREEN or COPPER) from the junction box and the fixture ground wire to the green ground screw on the Mounting Bracket (A). Or connect both wires together using a wire connector.
7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate (J) over the Threaded Rod (D), so it protrudes through the hole in the Back Plate (J).
9. Thread the Deco Nut (H) onto the Threaded Rod (D) and continue turning until the Back Plate (J) is snug against the wall.
10. Install bulbs according to the fixture specifications.

**YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND TEST THE
FIXTURE.**

Fig. 1

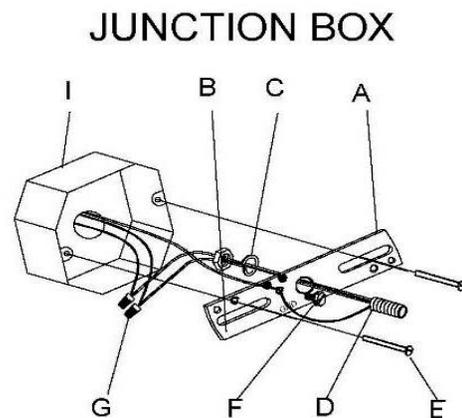


Fig. 2

WIRE CONNECTOR

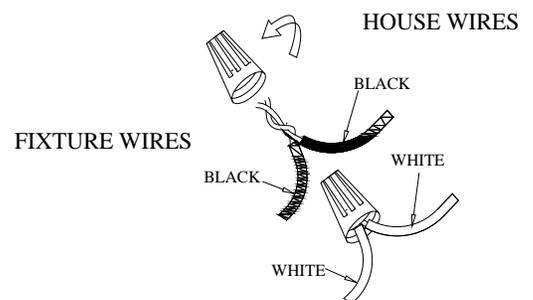


Fig. 3

